

The ultimate in productivity.

e-STUDIO™ 3525ACG/4525ACG/5525ACG

- 1

Dual Scan Document Feeder

available with Double Feed Detection – Scans up to 240 IPM; holds up to 300 originals (refillable)
- 2

10.1” Tilttable Front Panel

makes programming jobs easier than ever – even for wheelchair users – and is Section 508 friendly
- 3

Card Reader

pocket enables badge authentication to control device access
- 4

Soft Closing Drawers

automatically pull drawer closed when initiated and provide a luxury experience
- 5

65-Sheet Stapling Finishers

and an output capacity of up to 3,000 pages enable bigger jobs
- 6

Saddle Stitch Finishing

enables up to 60-page booklets, and unique avalanche tray increases exit capacity
- 7

Tandem LCF Pedestal

holds 2 × 1,000-sheet stacks of letter-size paper, while refillable design allows users to add paper while MFP is in use
- 8

2,000-Sheet External LCF

boosts paper capacity to an amazing 5,200 sheets



e-STUDIO™ 3525ACG/4525ACG/5525ACG

Main Specifications

|                    |                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                           |
|--------------------|-----------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| Copy System        | Indirect Electrostatic<br>Photographic/OPC/Laser Printing/Heat Roller Fusing<br>10.1" Color WSVGA Touch Screen Tilting Display<br>35/45/55 PPM (LT)                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                       |
| Display            | Color: Less than 7.8/5.7/5.6 seconds                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                      |
| Copy Speed         | Monochrome: Less than 5.9/4.4/4.3 second                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                  |
| First Copy Out     | From Powering on: Approx 20/20/26 seconds<br>From Sleep & Low Power: Less than 12/12/20 seconds<br>600 × 600 dpi                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                          |
| Warm-Up Time       | 3.9" × 5.8" to 12" × 18", 12" × 47" Banner, Envelope<br>Up to 999 Copies                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                  |
| Copy Resolution    | Standard 1,200 Sheets/Max. 5,200 Sheets                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                   |
| Stack Feed Bypass  | 300-Sheet DSDF or DSDF with Double Feed Detection or<br>100-Sheet RADF                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                    |
| Multiple Copying   | LD/A3                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                     |
| Paper Capacity     | Drawer 1: 550 Sheets-ST-R to LD<br>Drawer 2: 550 Sheets-ST-R to 12" × 18"                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                 |
| Original Feed      | Stack Feed Bypass:<br>100 Sheets-3.9" × 5.8" to 12" × 18", 12" × 47" Banner<br>Opt. 550-Sheet Paper Feed Pedestal-ST-R to 12" × 18"<br>Opt. 550-Sheet Drawer for PFP-ST-R to 12" × 18"<br>Opt. Envelope Cassette for PFP-Approx. 60 Envelopes/550 Sheets-ST-R to LG<br>Opt. 2,000-Sheet Tandem LCF (Pedestal Type)-LT Only<br>Opt. 2,000-Sheet External LCF-LT Only<br>Standard: 550 Sheets x 2-16lb Bond-110lb Cover<br>Stack Feed Bypass: 100 Sheets-14lb Bond-110lb Cover<br>Opt. 550-Sheet Paper Feed Pedestal-16lb Bond-110lb Cover<br>Opt. 550 Sheets Drawer for PFP-16lb Bond-110lb Cover<br>Opt. Envelope Cassette for PFP-16lb Bond-140lb Index<br>Opt. 2,000-Sheet Tandem LCF (Pedestal Type)-17lb-28lb Bond<br>Opt. 2,000-Sheet External LCF-LT 16lb Bond-110lb Cover<br>Standard Automatic Duplex Unit (16lb Bond-140lb Index)<br>25% to 400% |
| Max. Original Size | Max 105K/105K/106K Month (Color: 100%)<br>Max 210K/210K/212K Month (Monochrome: 100%)<br>Approx. 169lb/172lb/173lb                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                        |
| Paper Feed Sizes   | 23" (W) x 25.2" (D) x 31" (H)<br>CMY: 38K, K: 39.8K @ 5%                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                  |
|                    | 120 Volts, 50/60 Hz, 12 Amps<br>Maximum 1.8kW (120V)                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                      |
| Duplex             | NEMA 5-15                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                 |
| Reproduction Ratio | 8GB                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                       |
| Max Duty Cycle     | 128GB Solid State Drive (SSD), 512GB FIPS 140-2 SSD                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                       |
| Weight             |                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                           |
| Approx. Dimensions |                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                           |
| CMYK Toner Yield   |                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                           |
| Power Source       |                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                           |
| Power Consumption  |                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                           |
| Plug Type          |                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                           |
| Memory             |                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                           |
| Hard Disk Drive    |                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                           |

e-BRIDGE Next Print Specifications

|                        |                                                                                                                                                                                                                          |
|------------------------|--------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| PDL                    | PCL5e, PCL5c, PCL6 (PCL XL), PS3, PDF, XPS, JPEG                                                                                                                                                                         |
| Print Resolution       | 600 × 600 dpi (5 bit), 1,200 × 1,200 dpi (Color/2 bit) or 3,600 (Equivalence) x 1,200 dpi (BW/with Smoothing) (PS3 Only)                                                                                                 |
| Operating Systems      | Windows® 8.1/10, 11, Windows Server® 2012/R2, Windows Server® 2016/19/22, Macintosh® (macOS X 10.10-15, 12), Unix®, Linux®                                                                                               |
| Network Protocols      | TCP/IP (IPv4, IPv6), NetBIOS over TCP/IP, IPX/SPX for Novell®                                                                                                                                                            |
| Printing Protocols     | Environments, EtherTalk for Macintosh Environments<br>SMB V1-3, LPR/LPD, IPP V1.2 w/Authentication (TLS 1.2/1.3), AppleTalk® PAP or EtherTalk, Port 9100 (Bi-Directional), NetWare P-SERVER LPD                          |
| Print Drivers          | w/iPrint, Bluetooth (HCRP/BIP/OPP/FTP), WS Print, FTP<br>Windows® 8.1 (32-bit, 64-bit), Windows Server® 2012/R2 (64-bit), Windows Server® 2016/19/22, Windows® 10, 11 (64-bit), macOS X 10.12-15, 11, 12                 |
| Interface              | RJ-45 Ethernet (10/100/1000 Base-T), USB 2.0 (High-Speed)<br>Optional IEEE802.11b/g/n, Wireless LAN, Optional Bluetooth                                                                                                  |
| Wireless Device        | AirPrint®, Mopria®, e-BRIDGE Print & Capture Application on iOS and Android (Available via Apple® App Store or Google Play)                                                                                              |
| Device Management      | TopAccess                                                                                                                                                                                                                |
| Account Control        | Up to 10,000 Users or 1,000 Departments Supports User Authentication (on Device), Login Name/Password (via Windows® Domain) or Login Name/Password (via LDAP Server) for Copy, Print, Scan, Fax, List, and User Function |
| Accessibility Features | Tilt Front Panel, Job Programs, Universal Grip for Paper Trays, Disable Screen Timeout, Audible Beeps, Optional Voice Assist                                                                                             |



Designs and specifications subject to change without notice. Specifications may vary by conditions of use and/or environmental usage. For best results and reliable performance, always use supplies manufactured or designated by Toshiba. Not all options and accessories may be available at the time of product launch. Please contact a local Authorized Toshiba Dealership for availability. Toner yields are estimates based on 5% coverage, letter-size page. Driver and connectivity feature support varies by client/network operating system. AirPrint® and the AirPrint® logo are trademarks of Apple Inc. This is a Class 1 laser product complying with IEC60825-1. All company and/or product names are trademarks and/or registered trademarks of their respective manufacturers in their markets and/or countries.

|                         |                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                    |
|-------------------------|------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| Security Features       | User Authentication, Trusted Platform Module, On-Board Data Scramble Function, SCEP, Disable, e-Filing, Disable Copy, Disk Overwrite*, IP Address Filtering (10 Sets), MAC Address Filtering (10 Sets), Network Service Control, Network Port Control, SMB Packet Signing, SSL/TLS (HTTP, IPP, LDAP, SMTP, POP, FTP, DPWS, SYSLOG), IPsec (IKEv1, IKEv2), Security Mode Change, CC Certified (ISO/IEC15408)* with HCD-PP v1.0, IEEE802.1X (Wired/ Wireless), Digital Signature for Client Utilities, Password Policy, Password Lock, Password Expiration, Self Testing, Job Access Control, Log Access Control for Job Log, Security Stamp, Role Based Access Control, Secure PDF, Digital Signature for Firmware Update, Integrity Check Function, Image Log, Card Authentication, Biometric Authentication *Requires FIPS HDD, Conformance with HCD-PPv1.0 in High Security Mode |
| Environmental Standards | ENERGY STAR® (V3.1), EPEAT Gold, Californian Proposition 65                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                        |
| Certifications          | WHQL (Windows® 8, 8.1, 10, 11, 2012, 2012 R2, 2016/19/22), Novell®, Citrix®, SAP, AirPrint® and Mopria®                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                            |

Scan Specifications

|                   |                                                                                                                                                                                                                                                                                                                  |
|-------------------|------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| Scan Speed        | DSDF Scan: Up to 240 IPM Duplex, 120 IPM Simplex (Monochrome or Color)<br>RADF Scan: Up to 73 IPM (Monochrome or Color)<br>DSDF Simplex or Duplex: 9.3-110lb Bond<br>RADF Scan: Simplex: 9.3-41.8lb Bond, Duplex: 13.3-41.8lb Bond<br>Standard: Full Color, Auto Color, Monochrome, Grayscale<br>DOC/XLS/PPT/PDF |
| Scan Weights      | 600 dpi, 400 dpi, 300 dpi, 200 dpi, 150 dpi, 100 dpi                                                                                                                                                                                                                                                             |
| Scan Modes        | Monochrome: TIFF-Multi/Single Page, PDF-Multi/Single Page, PDF/A, Searchable PDF, XPS-Multi/Single Page, DOCX, XLSX, PPTX                                                                                                                                                                                        |
| OCR               | Color/Grayscale: JPEG, TIFF-Multi/Single Page, PDF-Multi/Single Page, PDF/A, Slim PDF, Searchable PDF, XPS-Multi/Single Page, DOCX, XLSX, PPTX                                                                                                                                                                   |
| Scan Resolution   | Color/Grayscale: JPEG (High, Middle, Low)                                                                                                                                                                                                                                                                        |
| File Formats      |                                                                                                                                                                                                                                                                                                                  |
| Image Compression |                                                                                                                                                                                                                                                                                                                  |

Facsimile Specifications

|                     |                                                                      |
|---------------------|----------------------------------------------------------------------|
| Compatibility       | Super G3                                                             |
| Data Compression    | MH/MR/MMR/JBIG                                                       |
| Transmission Speed  | Approx. 3 Seconds Per Page                                           |
| Fax Modem Speed     | Up to 33.6 Kbps                                                      |
| Memory Transmission | 100 Jobs (with HDD), 2,000 Destinations Max.<br>400 Destinations/Job |
| Scan Speed          | 0.7 Seconds Per Page, Maximum 73 IPM                                 |

e-Filing Specifications

|                   |                                                                              |
|-------------------|------------------------------------------------------------------------------|
| Operation Method  | Color Touch Screen Control Panel or Client PC                                |
| Number of Boxes   | 1 Public Box, 200 Private User Boxes                                         |
| Capacity of Boxes | 100 Folders Per Box, 400 Documents Per Folder/Box,<br>200 Pages Per Document |

Accessories (Options)

|                                             |            |                               |            |
|---------------------------------------------|------------|-------------------------------|------------|
| <b>Platen &amp; Document Feeder Options</b> |            | CAC/PIV Card Reader           | SCR3310V2  |
| DSDF                                        | MR4010     | CAC/PIV Enabler               | GS1013NODE |
| DSDF with Double Feed Detection             | MR4020     | IPSec Enabler                 | GP1080NODE |
| RADF                                        | MR3033     | Unicode Font Enabler          | GS1007NODE |
| Platen Cover                                | KA5005PC   | Multi-Station Print Enabler   |            |
| <b>Additional Paper Options</b>             |            | Per Seat License              | GS1090NODE |
| Paper Feed Pedestal                         | KD1072     | e-BRIDGE Plus for OneDrive    | GB2300NODE |
| Drawer Module                               | MY1052     | e-BRIDGE Plus for SharePoint  | GB2310NODE |
| Envelope Cassette Option                    | MY1053     | e-BRIDGE Plus for Exchange    | GB2320NODE |
| Large Capacity Feeder                       | KD1073LT   | Workplace Productivity Bundle | GB2330NODE |
| External Large Capacity Feeder              | MP2002     | e-BRIDGE Plus for Gmail       | GB2380NODE |
| <b>Finishing Options*</b>                   |            | e-BRIDGE Plus for Google      |            |
| 50-Sheet Inner Finisher                     | MJ1048     | Workspace                     | GB2390NODE |
| Hole Punch for MJ1048                       | MJ6011     | Hardcopy Security Printing    | GP1190NODE |
| 65-Sheet Staple Finisher                    | MJ1113     | Security SSD (512GB)          | GE1280     |
| 65-Sheet Saddle-Stitch Finisher             | MJ1114     | FIPS HDD (320GB)              | GE1260     |
| Hole Punch for MJ1113/MJ1114                | MJ6107     | e-BRIDGE Plus Voice Guidance  | GB2540NODE |
| Bridge Kit                                  | KN5005     | e-BRIDGE Global Print         | GB2550NODE |
| Job Separator                               | MJ5015     | <b>Miscellaneous Options</b>  |            |
| <b>Connectivity/Security Options</b>        |            | Card Reader Holder            | GR1320     |
| FAX Unit/2 <sup>nd</sup> Line for FAX Unit  | GD1370N    | Accessory Tray                | GR1330     |
| Wireless LAN/Bluetooth                      | GN4030A3   | Panel 10-Key Option           | GR1340     |
| Fax Over IP License Key                     | GS1100NODE | Stand                         | STAND5015  |
| Bluetooth Keyboard                          | GR9001     | Work Tray                     | KK5005     |
| 2 <sup>nd</sup> NIC Holder                  | GR1430     | Manual Pocket                 | KK5008     |
| USB Hub                                     | GR1420     | Harness for Coin Controller   | GQ1280     |
| Meta Scan Enabler                           | GS1010NODE | Accessible Arm                | KK2560     |

\*MJ1048 - 35 & 45 PPM models only

Corporate Office

|            |                                                                                                                                                 |
|------------|-------------------------------------------------------------------------------------------------------------------------------------------------|
| East Coast | 25530 Commercentre Drive, Lake Forest, CA 92630<br>Tel: 949-462-6000<br>959 Route 46 East, 5th Floor, Parsippany, NJ 07054<br>Tel: 973-316-2700 |
| Midwest    | 8770 W. Bryn Mawr Ave., Suite 700, Chicago, IL 60631<br>Tel: 773-380-6000                                                                       |
| South      | 2037 Bakers Mill Rd., Dacula, GA 30019<br>Tel: 678-546-9385                                                                                     |
| West Coast | 25530 Commercentre Drive, Lake Forest, CA 92630<br>Tel: 949-462-6000                                                                            |
| Website    | business.toshiba.com                                                                                                                            |


TOSHIBA

e-STUDIO™ 3525ACG/4525ACG/5525ACG

Introducing a new generation of multifunction printers (MFPs) – with high-performance, advanced security and cloud-ready features, these printers are the perfect choice for today's modern work environments.

- Highly Productive Color MFPs
- High-speed - 35, 45 & 55 PPM
- TAA Compliant
- Leading-edge Security Features
- CAC/PIV Authentication
- Cloud Print & Service Capabilities



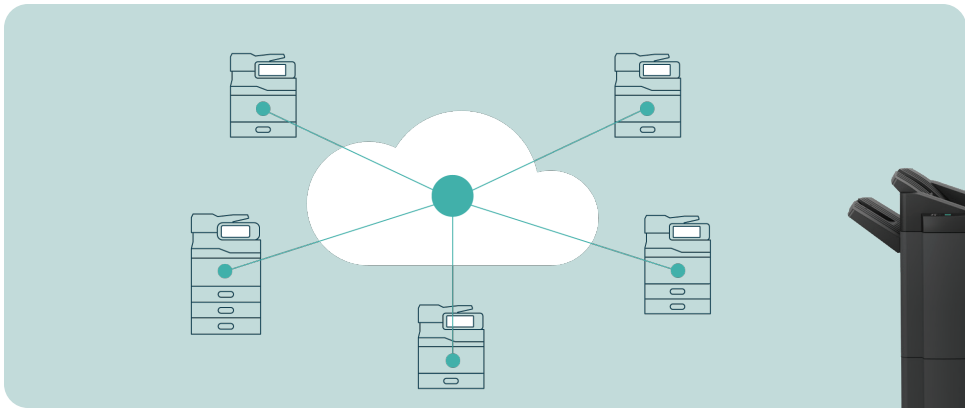

**TOSHIBA**



## Cloud-ready and secure for today's digital workplace.

Today's new hybrid work environment demands that information be available and accessible from anywhere at any time for organizations to be efficient and productive. Yet it needs to be secure. Introducing Toshiba's newest e-STUDIO™ workgroup MFPs, specifically designed to meet this need. Providing the ultimate in productivity through speed, quality and consistency, these printers also deliver a zero-trust approach for the highest level of security and cloud-ready features built-in for anywhere accessibility.

## At Toshiba, productivity is a priority.

Our new color MFPs are faster and more productive, secure, and reliable than any other workgroup models Toshiba has ever produced. With everything from a super-charged document feeder to greater maximum paper capacity to next-level finishing performance, these new models raise the bar on what an MFP can do for productivity in the modern workplace.

**35, 45 & 55 PPM** for departmental-level performance in a workgroup-size device, designed to handle more volume for more users.

**New High-Speed, High-Capacity Dual Side Document Feeder (DSDF) with Double Feed Detection (DFD)** for the most mission-critical scanning environments, providing up to 240 IPM duplex scan speeds.

**High-Resolution** for crisp image quality: up to 1,200 dpi x 1,200 dpi.

**Continuous Scan** allows you to switch seamlessly between simplex, duplex, original size, and orientation, or even switch from DF to glass in one scan job.

**Enhanced Scan Functions** provide options for mixed sizes, sources orientation, and more in one job – as well as employ a network share location right from front panel.

**Accurate Color & e-BRIDGE® Color Profiler Tool V4.1** allows demanding color print users to accurately hit the widest array of recognized Pantone colors or unique brand identity colors – or match other output devices.



**65-Sheet Stapling** takes finishing to the next level and is available on both the regular and saddle stitch finisher, the latter capable of producing booklets up to 60-pages.

**5,200-Sheet Maximum Paper Capacity** helps you pump up the volume thanks to our modular design. Choose one or two drawer paper feed pedestals or tandem LCF – and for those really demanding environments, an additional external Large Capacity Feeder (LCF).


**10.1" Tablet-Style Full Color Tilting Touch Screen Panel** offers touch swipe User Interface (UI) featuring newly designed icons that provide access to the MFP's core functions and productivity-enhancing workflow solutions – all while offering a consistent and familiar user experience to the entire Office Collection.



**Built-in OCR (Optical Character Recognition)** allows you to quickly and easily scan paper documents to create searchable PDFs or editable document formats such as Microsoft® Word®.

**Annotation & Bates Stamping** allows you to assign a unique identifier to documents for indexing, labeling, and identifying content to ensure all pages are accounted for.

**Voice Guidance Technology** affirms your programming selections and is a great option for users with visual disabilities through Section 508 of the Rehabilitation Act, opening it up to a wider audience.

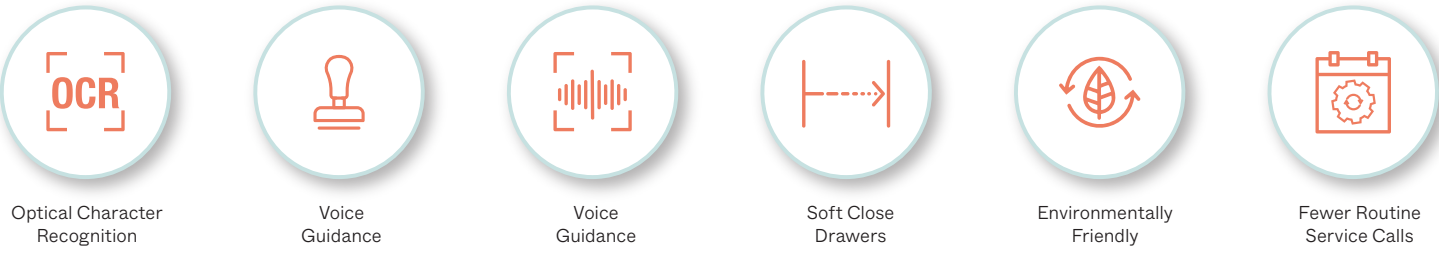

## Security is job number one.

**secureMFP**

Security has never been a more critical consideration for any device in today's business landscape. MFPs have the extra burden of being shared by all users, and many if not all written documents pass through this device while being printed, scanned, faxed, or copied. That's why Toshiba strongly believes in zero-trust security principles while designing the applications and cloud services for MFPs. Instead of assuming that the applications and services running on MFPs behind the corporate firewall are safe, we ensure that access and communication with the MFP is fully authenticated, authorized, and encrypted. We accomplish this by enhancing security using the following features:

**Trusted Platform Module 2.0** features the latest version of hardware-based security that safeguards all data on the MFP using cryptographic keys.

**Built-in Antimalware** that's stronger than antivirus protects the MFP from Trojan horses, ransomware, spyware, rogue software, and more.

**OAuth2 Token-based Identity Management** helps integrate cloud services with your existing identity management, therefore credentials are not replicated, and the chance of vulnerabilities is reduced.

**Enhanced Data Encryption with TLS 1.3** keeps the communication between MFP and other applications fully secure thanks to the latest and most secure version of transport layer security.

**Soft Closing Drawers** provide a luxurious feeling and better end user experience.

**Environmentally Friendly** is the Toshiba way: RoHS compliant, recycled plastics, Low-Power (1W) Super Sleep Mode, and our EcoSmart Recycling Program – as well as lower TEC values for more energy efficiency, earning them the newest EPA ENERGY STAR rating.

**Higher Duty Cycles and Periodic Maintenance Intervals** provide greater volume with fewer routine service calls so you can stay focused on productivity.

**Built-in 128GB Solid State Drive (SSD)** ensures improved system reliability, while a second **FIPS 140-2 validated 512GB SSD** conforms to the Federal Information Processing Standards, providing secure onboard document storage.

When configured in High Security Mode, these MFPs meet the **Hardcopy Device Protection Profile (HCD-PP)** using the Common Criteria (CC) methodology for information technology security evaluation.

**CAC/PIV Authentication** capability enables controlled device access.



**e-STUDIO™ 3525ACG/4525ACG/5525ACG**

## Harness the power of the cloud.

With **Elevate Sky®** from Toshiba, you'll find cloud-based print solutions for the modern workforce, allowing workflows to seamlessly integrate your MFPs and documents with the cloud applications you're already using.

**e-BRIDGE® Global Print** allows you to fully embrace cloud technology. It simplifies and secures your print environment while providing the flexibility for users to print from anywhere – work, home office, or on the road.

**Elevate Sky® Service** from Toshiba is a suite of cloud-based applications designed to better manage print and document environments by improving device uptime and visibility to fleet usage and performance.

Leveraging big data analytics and artificial intelligence, Elevate Sky™ Service can identify impending errors before they happen. In many cases, remote intervention can address the issue before affecting regular device operations.

**Elevate Sky® MFPConnect** is an innovative and exclusive, cloud-based app that's ideal for remote fleet management, application and license deployment, and policy-based security management for your fleet.

**Elevate Sky® Remote Assist** enables technicians, with the end-user's approval, to remotely access the MFP and perform diagnostics and adjustments potentially eliminating the need for what might otherwise be an onsite service call.

**Elevate Sky® Predict** assists technicians by applying predictive analytics to anticipate an MFP's service needs thus improving uptime.

**Elevate Sky® Reports** monitors MFP usage patterns, generate, and schedule custom reports for their entire fleet to gain valuable insights into how MFPs are being utilized.



Toshiba's cloud-ready MFPs and our team of experts provide the solutions your business needs to improve workflows and print smarter. Utilizing the latest technological advancements and security standards, we provide end-to-end solutions to help you seamlessly and securely navigate today's digital workplace from consulting, cloud migration, fleet management, implementation, and technical support.